


System Family datasheet

Ceiling lining
Floor
Partitions

System Isover

Placoplatre® BA13 - EI 60 - 59dB - max 3,85m

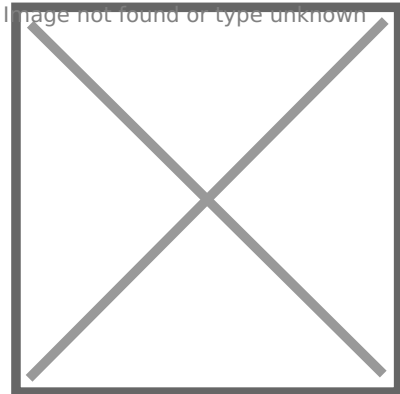

Glass insulating strips are designed as thermal and acoustic insulation of pitched roofs and ceilings. Particularly energy-efficient insulation type, $\lambda_D = 0.033 \text{ W} \cdot \text{m}^{-1} \cdot \text{K}^{-1}$. Glass insulating strips are designed as thermal and acoustic insulation of pitched.

Key facts

- Pink face paper
- Brown reverse side paper
- Available in tapered and square edge
- Complies with EN 520 - Type F Thermal
- Conductivity 0.24W/mK

Marketing description

ThistlePro DuraFinish plaster is 60% more hardwearing than standard plaster providing excellent resistance to glancing impacts or accidental damage such as scratching, gouging or chipping. Ideal for high-traffic areas including corridors, stairwells and canteens in healthcare, leisure, social housing, education or office buildings, as well as busy hallways and rooms in houses.

ThistlePro DuraFinish plaster can be used on plasterboard or undercoat plasters, or for re-plastering and repair work on previously finished walls.

Any damage to small areas does not spread or cause debonding, making repairs easier.

Characteristic

Dimension

Number of plates per facing

3

Number of layers

5

Total thickness

140

Superficial Hardness

HD

General

Name

GypWall RAPID dB Plus

Partition type

Separative standard

Insulate type

Glass wool

Activ'Air

No

Performances

Fire Protection

60

Acoustic attenuation

A2-S1, d0

Classification of wet rooms

EA, EB

Shock Proof

120

References

n° PV acoustic

RE CSTB AC14- 4958201484/2

n°PV fire

RS 15-036

Product quantities

Product	Coverage Qty	Coverage unit
Isover Premium 33	5	10
Product vetrotech	3	6